


Uputstvo za zamenu auto stakala

OEM
APPROVED
ADHESIVE SYSTEMS

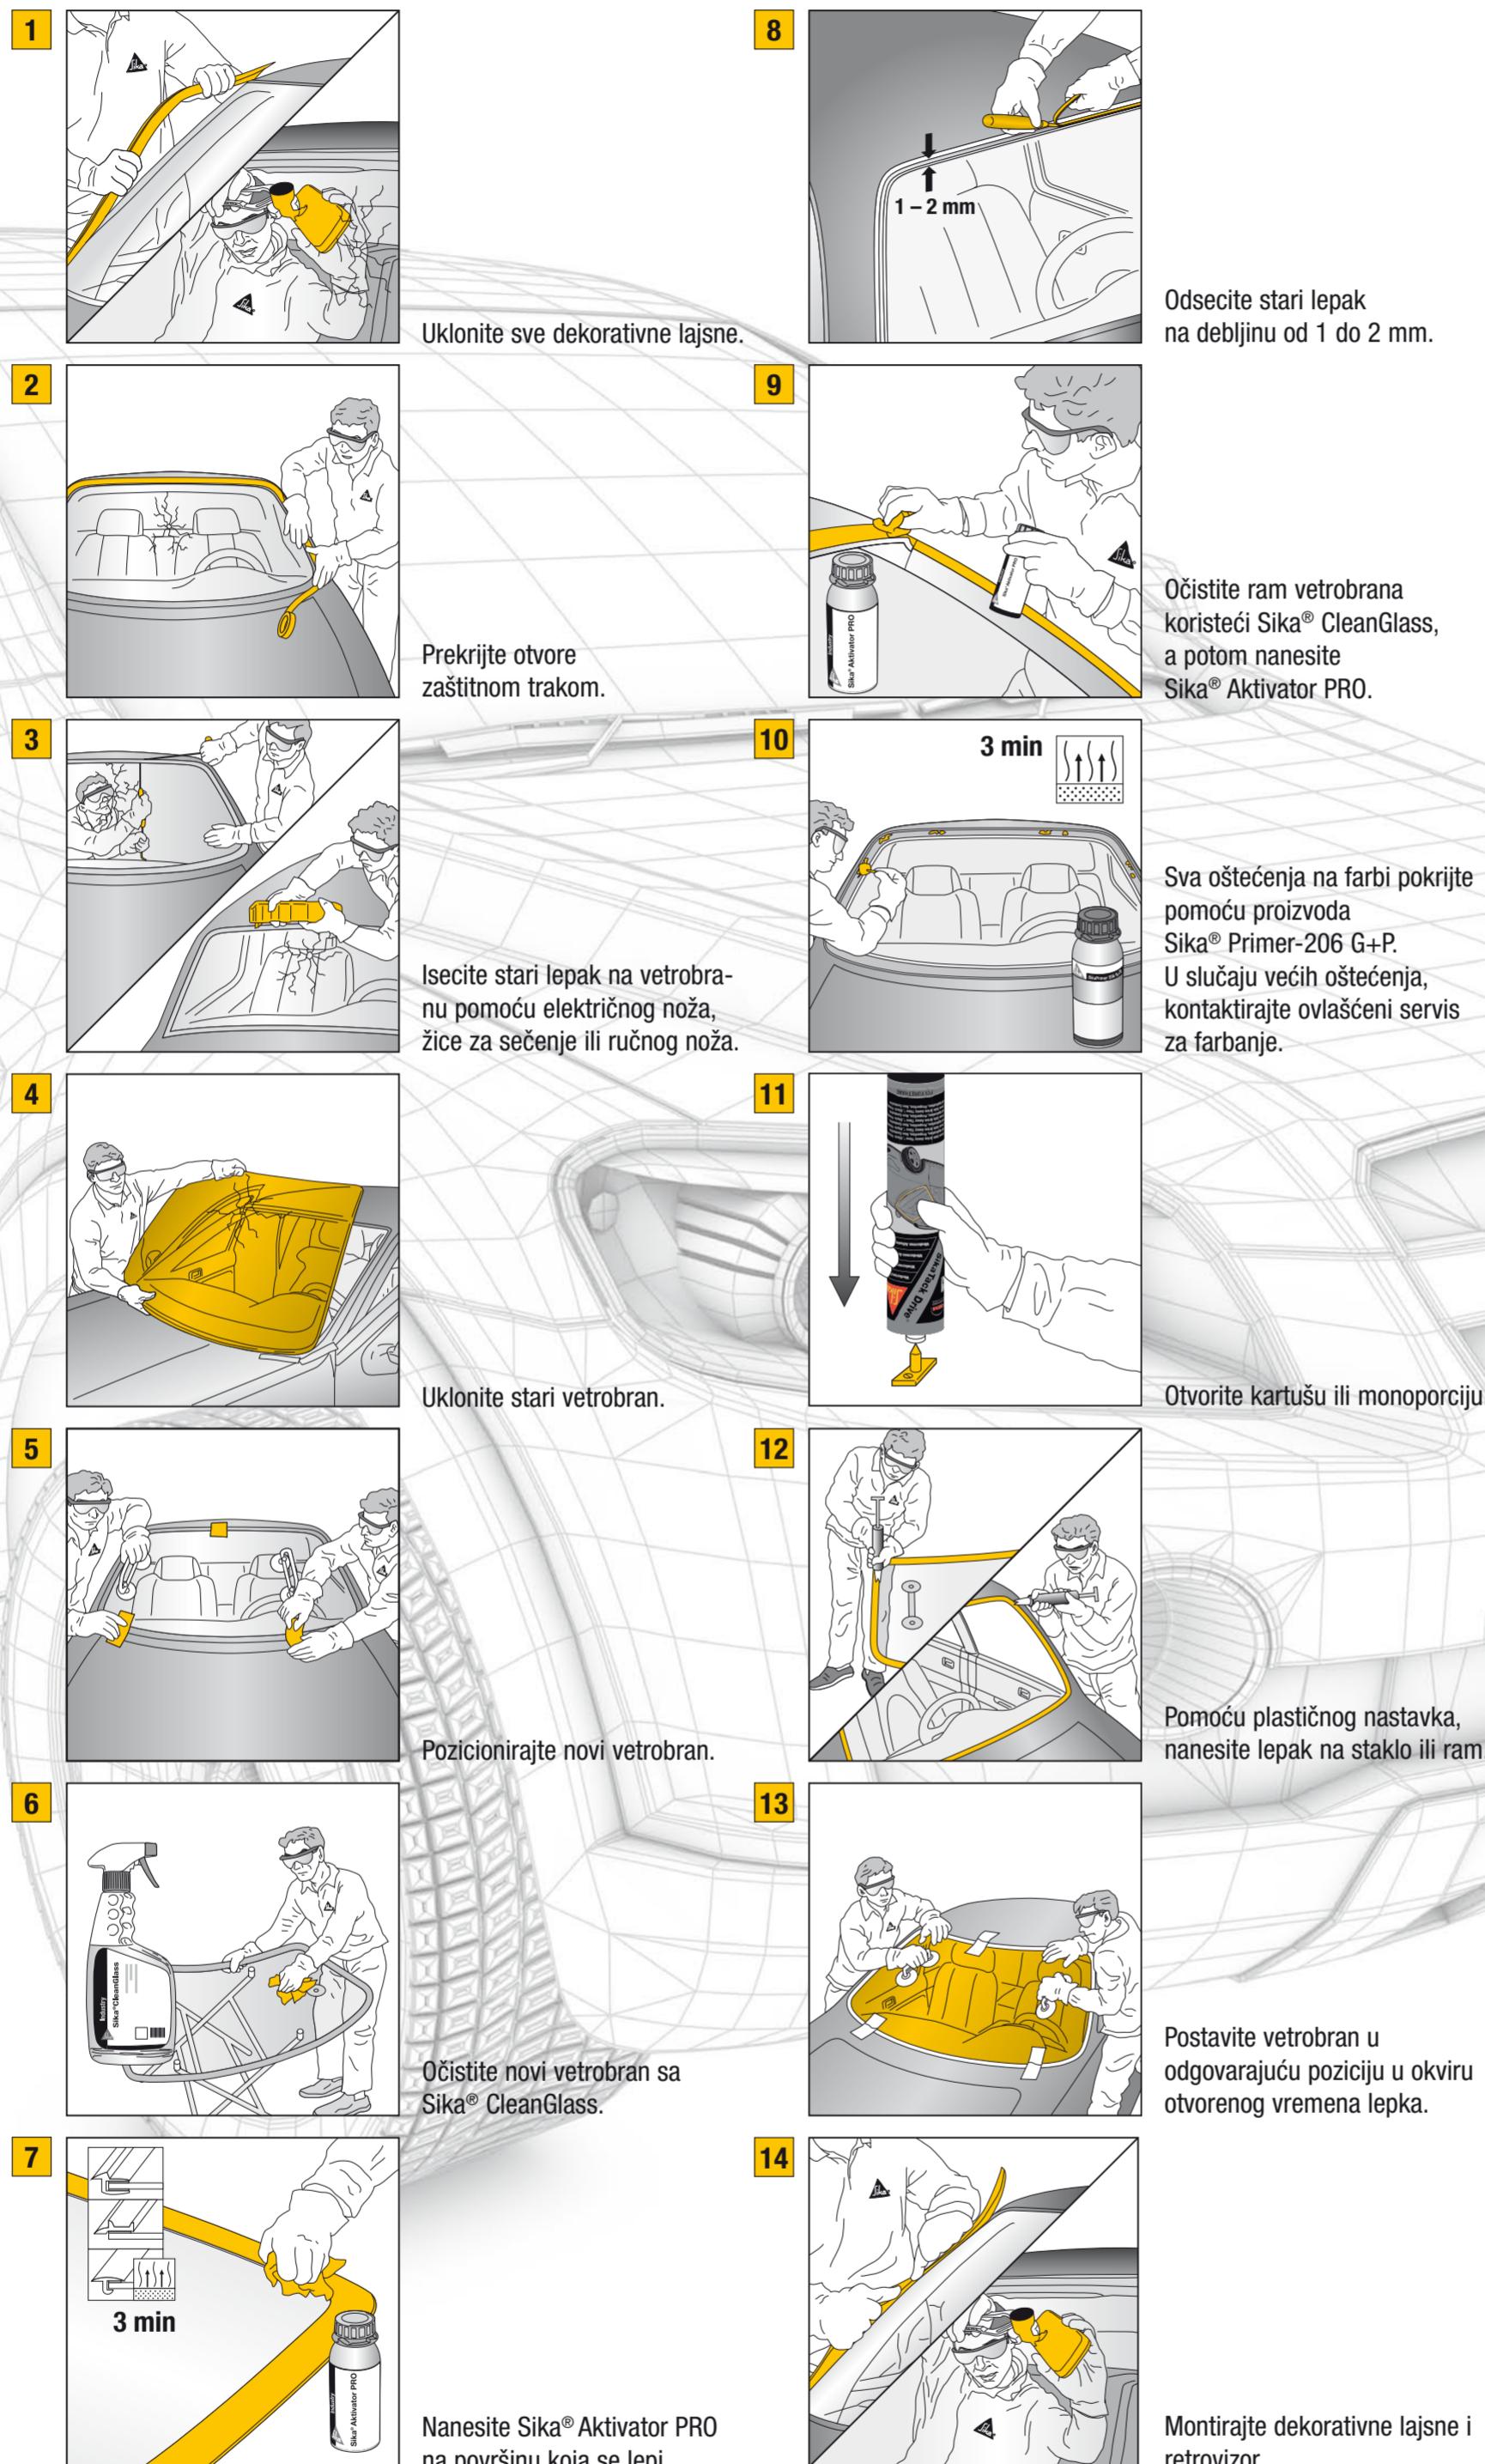

Osnovne karakteristike proizvoda	SikaTack® MOVE IT	SikaTack® Drive
Safe Drive-Away Time*	60 minuta od -10 °C to +35 °C	2 sata od + 5 °C/80% r.v.v. do + 35 °C/20% r.v.v.
Moduli	Sika „All-in-One Modulus”	Sika „All-in-One Modulus”
Primenljiv za sva putnička vozila	•	•
Primenljiv kod stakala sa integrisanim antenom	•	•
Ne provodi struju	•	•
Bez upotrebe crnog prajmera	•	•
Otvoreno vreme	5 minuta	10 minuta
Lako nanošenje	•	•
Korišćenje bez zagrevanja	•	•
Završetak nanošenja	Veoma kratko	Veoma kratko
Premašuje OEM specifikacije	•	•
Stabilnost nanetog lepka	Veoma dobro	Veoma dobro

* U skladu sa US bezbednosnim standardom FMVSS 212/208
(testirano sa dvostranim vazdušnim jastucima i bez sigurnosnih pojaseva)



Primenljivi najnoviji Opšti uslovi prodaje.
Pre upotrebe proizvoda pročitajte najnovije izdanje Tehničkog lista ili kontaktirajte našu tehničku podršku.


www.sika.rs

Innovation &
Consistency | since
1910



Zamena auto stakala

Uputstvo za zamenu i pregled proizvoda

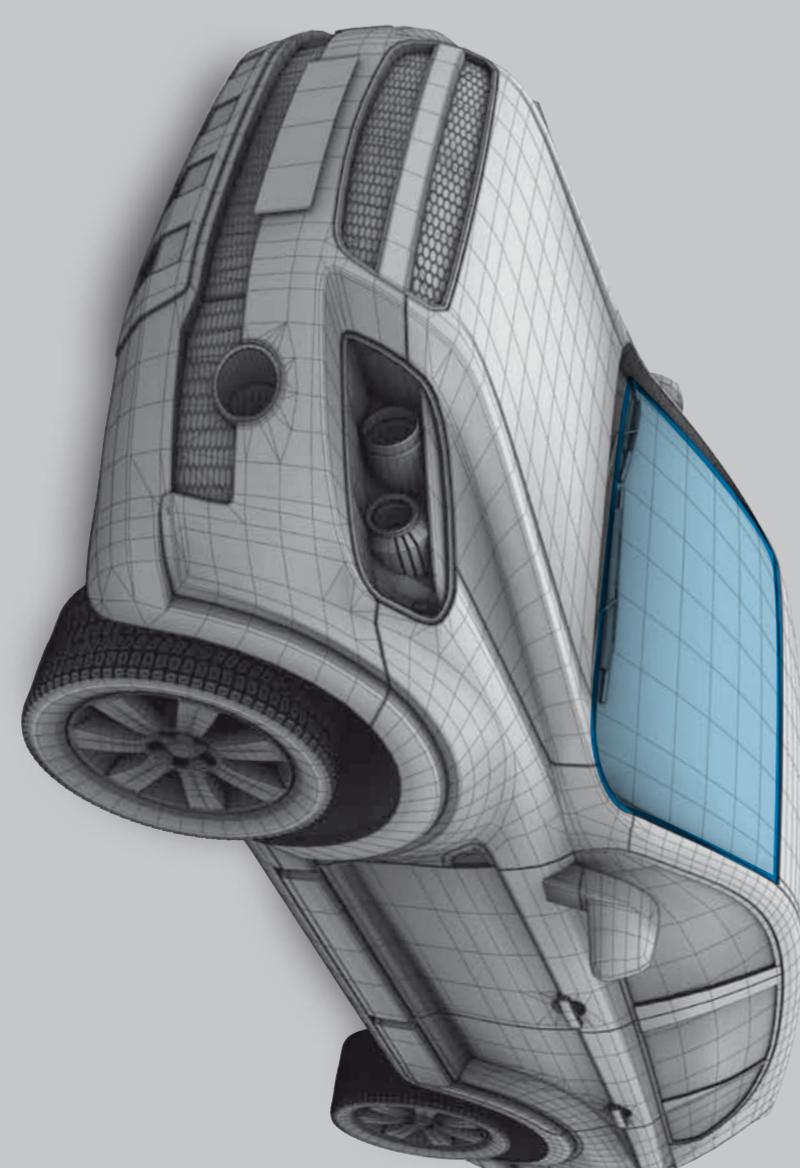

Sika® Cleaner S (II)
Unapredite kvalitet
čistene autostakla

